



09/28/00

THE ASSISTANT COMMISSIONER FOR PATENTS
Washington, D.C. 20231

EXPRESS MAIL NO. EL705824051US
Attorney Docket No. NC17164
Client/Matter No. 40725.830113.000

PATENT
jc511 U.S. PTO
09/672753
09/28/00

Sir:

Transmitted herewith for filing is the patent application of

Inventors: Juha Heiskala and John Terry

For: APPARATUS, AND ASSOCIATED METHOD, FOR FORMING A MODULATED SIGNAL UTILIZING OTD
AND TCM TECHNIQUES

Enclosed are:

- ☒ 6 sheets of drawing.
- ☐ An assignment of the invention to Nokia Mobile Phones Limited.
- ☐ A certified copy of a _____ application
- ☐ An associate power of attorney.
- ☐ A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27.
- ☒ An **unsigned** Declaration and Power of Attorney.
- ☒ Check in the amount of \$690.

The filing fee has been calculated as shown below:

(Col. 1)

(Col. 2)

FOR:	NO. FILED	NO. EXTRA
BASIC FEE		
TOTAL CLAIMS	20-20 =	-0-
INDEP CLAIMS	3-3 =	-0-
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIM PRESENTED		

*If the difference in Col. 1 is less than zero, enter "0" in Col. 2.

SMALL ENTITY

RATE	FEE	OR
	\$345	OR
x 9 =	\$	OR
x39 =	\$	OR
x130 =	\$-0-	OR
TOTAL	\$	OR

OTHER THAN A
SMALL ENTITY

RATE	FEE
	\$ 690
x18 =	\$ -0-
x78 =	\$ -0-
+260 =	\$ -0-
TOTAL	\$ 690

☐ Please charge my Deposit Account No. 08-2623 in the amount of \$_____. A duplicate copy of this set is enclosed.

☒ A check in the amount of \$ 690 to cover the filing fee is enclosed.

☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 08-2623.

☒ Any patent application processing fees under 37 CFR 17.

☐ The issue fee set in 37 CFR 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR 1.311(b).

☒ Any filing fees under 37 CFR 1.16 for presentation of extra claim

Robert H. Kelly
Robert H. Kelly, Regis. No. 33,922
HOLLAND & HART LLP
555 17th Street, #3200
P.O. Box 8749
Denver, Colorado 80201-8749
719/475-6463

285400

PATENT
EXPRESS MAIL NO. EL705824051US
Attorney Docket No. NC17164
Client/Matter No. 40725.830113.000

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:)
Juha Heiskala and John) Group Art Unit: _____
Terry)
Serial No. _____) Examiner: _____
Filed: Herewith)
For: APPARATUS, AND)
ASSOCIATED METHOD, FOR)
FORMING A MODULATED SIGNAL)
UTILIZING OTD AND TCM)
TECHNIQUES)

1c511 U.S. PTO
09/672753
09/28/00

CERTIFICATE OF MAILING BY EXPRESS MAIL

Box PATENT APPLICATION
Assistant Commissioner
for Patents
Washington, D.C. 20231

Sir:

The undersigned hereby certifies that the following documents:

1. Transmittal letter for Patent Application;
2. Utility Patent Application;
3. Unexecuted Combined Declaration and Power of Attorney;
4. 6 sheets of drawings;
5. \$ 690 filing fee;
6. Return postcard; and
7. Certificate of Mailing By Express Mail

relating to the above application, were deposited as "Express Mail", Mailing Label No. EL705824051US with the United States Postal Service, addressed to Box PATENT APPLICATION, The Assistant Commissioner for Patents, Washington, D.C., 20231,

28 Sep 00
28 Sep 00
Date

28 Sep 00
Date

Mailer

Robert H. Kelly
Robert H. Kelly
Robert H. Kelly
Reg. No. 33,922
Attorney for Applicant
HOLLAND & HART ^{LLP}
555-17th Street, Suite 3200
Post Office Box 8749
Denver, Colorado 80201
(719) 475-6463

**APPARATUS, AND ASSOCIATED METHOD, FOR FORMING
A MODULATED SIGNAL UTILIZING OTD AND TCM
TECHNIQUES**

5 The present invention relates generally to communications in a radio
communication system, such as a WLAN (wireless local area network), in
which data is communicated upon a channel susceptible to fading. More
particularly, the present invention relates to apparatus, and an associated
method, by which to form a modulated signal containing the data. The
10 modulated signal is formed utilizing Orthogonal Transmit Diversity (OTD)
techniques as well as Trellis-Coded Modulation (TCM) techniques. Data is
able to be communicated at high data rates, such as those required during
operation of a communication system constructed to be operated pursuant to
the specification set forth in the IEEE 802.11 standard.

15 **BACKGROUND OF THE INVENTION**

A communication system is formed, at a minimum, of a transmitting
station and a receiving station interconnected by a communication channel.
Communication signals generated by the transmitting station are transmitted
upon the communication channel to be received by the receiving station.

20 A radio communication system is a communication system in which at
least a portion of the communication channel is formed of a portion of the
electromagnetic spectrum. Increased mobility of communications is permitted
as a fixed or hard-wired connection is not required to be formed between the
transmitting and receiving stations.

25 A cellular communication system is an exemplary radio communication
system. A subscriber to a cellular communication system, when positioned at
almost any location throughout an area encompassed by the network

infrastructure of the cellular communication system, is able to communicate by way of the system with a mobile terminal.

The network infrastructure of an exemplary cellular communication system includes spaced-apart, fixed-site base stations which include transceivers. In such an exemplary system, each fixed-site base station defines a cell. As the mobile terminal used by the subscriber to communicate with another communication station travels between cells of the system, uninterrupted communication is possible by handing-over communications from one base station to another.

Several analogous types of wireless communication systems have been implemented, and others have been proposed, to encompass limited areas, such as the area encompassed by a building structure or office workplace. Wireless communication systems sometimes referred to as microcellular networks, private networks, and WLANs (wireless local area networks) are exemplary of such systems.

Wireless communication systems are typically constructed pursuant to standards promulgated by a regulatory or quasi-regulatory body. For instance, the IEEE 802.11 standard, and variants thereof, promulgated by the IEEE (Institute of Electrical and Electronic Engineering) is a wireless LAN standard pertaining generally to communications at various wireless frequencies including a 5GHz range and a 2.4 GHz range. The 802.11 standard specifies an over-the-air interface between a wireless client, e.g, a mobile terminal, and a base station or access point, as well as among wireless clients. Standards pertaining to a physical layer and an MAC (media access control) layer are set forth in such standard. The standard permits automatic medium sharing between different devices which includes compatible physical layers. Asynchronous data transfer is provided for in the standard, generally by way of the MAC layer which utilizes a CSMA/CA (carrier sense multiple access with collision avoidance) communication scheme.

While the IEEE 802.11a standard requires that data be able to be communicated at relatively high data rates, e.g., data rates in excess of 54 Mbits/sec, achieving such a throughput rate is difficult when the communication channel upon which the data is transmitted exhibits fading characteristics. The high data rate communication is required to be effectuable within a stringent spectral efficiency range, a stringent error rate performance level and within appropriate computational load requirements. At a data rate of 96 Mbits/sec, a spectral efficiency of six bits/s/Hz, including coding, is required. The 96 Mbits/sec data rate is desired to be effectuated with an error rate performance at least as good as the error rate performance set forth in the IEEE 802.11a standard at a reduced rate, e.g., a 54 Mbits/sec data rate.

Generally, to overcome distortion introduced upon a signal transmitted upon a channel which exhibits fading characteristics, various techniques are utilized.

Time encoding of the signal, prior to its transmission, is sometimes utilized to counteract the distortion introduced thereon during its transmission upon the channel. Time encoding introduces signal redundancy upon the signal. By increasing the time redundancy of the signal, the likelihood that the informational content of the signal can be recovered, once received at the receiving station, is increased. Introducing time redundancy into the signal is sometimes referred to as creating time diversity.

Space diversity is sometimes also utilized to overcome the distortion. Typically, space diversity refers to the utilization of more than one transmitting antenna transducer from which a communication signal is transmitted, thereby to provide spatial redundancy.

And, various modulation techniques are also utilized. TCM (Trellis-Coded Modulation), for instance, is sometimes utilized. Conventional TCM techniques typically utilize an acceptable number of states, e.g., less than 256 states. But, a resultant trellis that is utilized in conventional TCM requires

parallel transitions between states. The performance of a TCM scheme with parallel transitions provides almost no coding gain, relative to an uncoded communication scheme, when operated in a fading environment.

Multiple TCM is sometimes also utilized. In a TCM scheme, multiple
 5 coded symbols are transmitted during each transition in the trellis defined in the modulation scheme. Coding gains, sometimes almost 3 dB in magnitude, are sometimes achievable in the use of multiple TCM in contrast to conventional TCM. But, each increase in the effective length of the multiple-TCM requires another coded symbol to be added per transition. Additionally,
 10 each additional coded symbol requires another set of encoders, thereby increasing the complexity of the code. Additionally, coded symbols of the M-TCM require orthogonal channels for transmission. As spatial dimensions are generally not orthogonal, orthogonal time slots or frequency carriers are required to be used. The use of orthogonal time slots or frequency carriers
 15 would be contrary to the requirement to maintain spectral efficiency.

Additionally, trellis STC is sometimes utilized. When trellis STC is utilized, at least as many states are required as there are transitions per state. In other words, a trellis STC implementation would generally require at least 256 states. Such a trellis utilizing two-dimensional constellation is unable to
 20 provide a coding gain, merely a diversity gain, and thereby also is inadequate. ED-TCM (Enhanced Dimensional Trellis-Coded Modulation) is also sometimes utilized. In ED-TCM, subsets are selected from a Cartesian product constellation. Through such selection, though, the required spectral efficiency cannot be achieved.

25 As a result, while various modulation schemes are used to combat the effects of fading exhibited upon a communication channel, the existing modulation techniques are not able to ensure that data can be communicated at high data rates as required, e.g., pursuant to the IEEE 802.11 standard, while also maintaining acceptable spectral efficiency levels, error rate performance,
 30 and appropriate computation complexity levels.

If a manner could be provided by which better to modulate data which is to be communicated at high data rates upon a channel susceptible to fading, improved communication quality levels when operating a communication system would be possible.

- 5 It is in light of this background information related to wireless communications that the significant improvements of the present invention have evolved.

SUMMARY OF THE INVENTION

- The present invention, accordingly, advantageously provides apparatus,
10 and an associated method, by which to facilitate communications in a radio communication system, such as a WLAN (Wireless Local Area Network), in which data is communicated upon a channel susceptible to fading.

- Through operation of an embodiment of the present invention, a manner is provided by which to form a modulated signal containing the data.
15 The modulated signal is formed through the use of Orthogonal Transmit Diversity (OTD) techniques as well as Trellis-Coded Modulation (TCM) techniques. The resultant, modulated signal permits communication of data at high data communication rates while also maintaining high spectral efficiency, acceptable error rate performance, as well as also requiring only
20 modest computational complexities.

- In one aspect of the present invention, apparatus is provided for a sending station operable to send a communication signal representative of data to be communicated. At the sending station, trellis-coded modulation as well as orthogonal transmit diversity techniques are utilized to form a modulated
25 signal containing data to be communicated upon a communication channel. Symbol sequences formed as a result of utilization of such techniques are applied to separate transmit antennas to be transduced therefrom.

The transmit antennas transduce the symbol sequences applied thereto, and the sequences are communicated upon communication channels to a

receiving station. At the receiving station, the receive sequences are separated and receive circuitry operations are performed thereon to recreate the informational content of the data.

In one implementation, apparatus is provided for a sending station
 5 operable in a WLAN (Wireless Local Area Network) operable pursuant, e.g., the IEEE 802.11a standard, or a variant thereof. In a WLAN, fixed-site transceivers, sometimes referred to as access points, are positioned at selected locations. Access points communicate with mobile terminals positioned within a coverage area defined by the access points. Through operation of an
 10 embodiment of the present invention, fading exhibited upon channels connecting the access point and a mobile terminal is compensated for by forming signals in which orthogonal transmit diversity and trellis-coded modulation techniques are utilized.

In these and other aspects, apparatus, and an associated method, is
 15 provided in a communication system having a sending station for sending data upon a communication channel. The communication channel is susceptible to fading. Apparatus is provided for the sending station to convert the data into a form to facilitate communication thereof upon the communication channel. A multi-dimensional trellis-coded modulator is coupled to receive indications
 20 of the data to be sent by the sending station. The multi-dimensional trellis-coded modulator forms N-dimensional, trellis-encoded sequences therefrom. A first transmit antenna and at least a second transmit antenna is coupled to the multi-dimensional, trellis-coded modulator. A first N-dimensional sequence is transduced by the first transmit antenna, and a second N-
 25 dimensional transmit antenna is transduced by the second transmit antenna. The first and second N-dimensional sequences exhibit orthogonal transmit diversity.

A more complete appreciation of the present invention and the scope thereof can be obtained from the accompanying drawings which are briefly

summarized below, the following detailed description of the presently-preferred embodiment of the invention, and the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 illustrates a functional block diagram of a communication system in which an embodiment of the present invention is operable.

Figure 2 illustrates a graphical representation of a 128 QAM symbol constellation.

Figure 3 illustrates a graphical representation of a TCM constellation utilized for 8-D signaling.

Figure 4 illustrates a graphical representation of four constellations which have a minimum squared distance of $4d_0$.

Figure 5 illustrates a functional block diagram of the apparatus of an embodiment of the present invention.

Figure 6 illustrates a graphical representation of the bit error rate plotted as a function of a signal-to-noise ratio of a signal received at a receiving station during operation of an embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring first to Figure 1, a communication system, shown generally at 10, provides for radio communications with mobile terminals, of which the mobile terminal 12 is exemplary, therein. In the exemplary implementation, the communication system 10 forms a WLAN (wireless local area network) which provides for radio communications with the mobile terminal as set forth in the IEEE 802.11 standard as well, potentially, pursuant to a proprietary mode of operation. Other communication systems can analogously be represented, and operation of an embodiment of the present invention is analogously also operable in such other communication systems.

In conventional manner, the WLAN includes a plurality of spaced-apart access points (APs) 14 positioned at spaced-apart locations. Two access points are shown in the Figure. In an actual WLAN, typically, in greater numbers of access points 14 are utilized. The access points 14 are sometimes
5 referred to as base stations or RADs (remote antenna devices). The term “access point” shall generally be used herein to identify such devices as the devices form the points of access to the network infrastructure of the communication system.

The access points 14 include radio transceiver circuitry 16 capable of
10 transceiving radio communication signals with mobile terminals when the mobile terminals are positioned within communication range of the access points. Generally, a mobile terminal communicates with an access point 14 when the mobile terminal is positioned within an area, referred to as a cell 18, proximate to, and defined by, the access point. The Figure illustrates a cell 18
15 associated with each of the illustrated access points.

The access points 14 are here shown to be coupled to a central control unit (CCU) 22. The CCU 22 provides control functions to control various aspects of operation of the WLAN. And, as shown, the CCU 22 provides for connections to an external communication network backbone 24. Although
20 not separately shown, other communication devices, such as other communication stations and other communication networks are typically coupled to the communication network backbone 24. Thereby, a communication path can be formed to provide for communications between the mobile terminal 12 and communication stations coupled, either directly or
25 indirectly, to the communication network backbone. Also, local communications between mobile terminals 12 are also permitted. In communications between pairs of mobile terminals, the communication path formed therebetween includes two separate radio-links.

In the exemplary implementation, the transceiver circuitry 16 forming a
30 portion of each access point includes the apparatus 28 of an embodiment of

the present invention. The apparatus 28 is operable to form a signal utilizing Orthogonal Transmit Diversity (OTD) as well as Trellis-Coded Modulation (TCM) techniques. The apparatus 28 is here shown to include an OTD-TCM (Orthogonal Transmit Diversity, Trellis-Coded Modulation) modulator 32.

5 Symbol sequences formed by the modulator 32 are applied to a plurality, here two, antenna transducers 34 by way of the lines 36. The antenna transducers transduce the symbol sequences provided thereto into electromagnetic form, and the symbol sequences are sent upon communication channels 38 to be received at an appropriate mobile terminal 12. The mobile terminal 12
10 includes as a portion thereof, apparatus 42 operable, pursuant to an embodiment of the present invention, to operate upon receive signals corresponding to the signals transmitted by the access point 16. The apparatus 42, due to the nature of the modulated signals formed during operation of the apparatus 28 are separable into individual paths, thereby to facilitate
15 recreation of the informational content of the data of which the signals are formed.

The multi-dimensional construction utilized pursuant to an embodiment of the present invention is predicated upon the integration of a convolutional code with a bandwidth-efficient modulation scheme. Such a combination is
20 able to achieve significant coding gain compared to uncoded schemes without a corresponding reduction in data rate throughput or increasing bandwidth requirements to communicate the encoded data. The combination of the convolutional coding with a bandwidth-efficient modulation scheme here is trellis-coded modulation, entails encoding a bit-value data stream with a
25 convolutional encoder and mapping the output coded bits to an expanded signal constellation.

Coding gain is achieved by partitioning the expanded signal set into subsets of increasing minimum squared distances. The convolutional encoder imparts a rule of correspondence such that shorter length transitions
30 originating and returning to the state correspond to intersubset transitions.

The longer length transitions correspond to intrasubset transition. This has the overall effect of increasing the minimum squared free distance in the trellis. The system yields a coding gain over an uncoded system provided that the power penalty associated with the expanded signal set is less than the gain in minimum squared free distance.

Multi-dimensional TCM is a generalized situation of the aforementioned trellis-coded modulation. The multi-dimensional construction of interest is referred to as the Wei construction. The Wei construction generates a two N-dimensional alphabet by utilizing a two-dimensional constellation in each one of N adjacent by the baud intervals. Thereafter, one redundant bit is added every N intervals. In contrast to a two-dimensional constellation, 2^{NM+1} signals are required in contrast merely 2^{M+1} signals. For large values of NM, the power penalty is considerably smaller than in a two-dimensional implementation.

In a multi-dimensional construction, the mapping between NM+1 bits and the signals may be converted into N simple constituent two-dimensional mappings. Also, the size of the constituent two-dimensional mapping is preferably maintained as small as possible. And, the peak-to-average power ratio is also kept as small as possible.

Figure 2 illustrates a constellation set, shown generally at 52, of a two-dimensional rectangular constellation having 2^Q signals. The constellation set forms a lattice, and added $1/N \cdot 2^Q$ signals are drawn from the same lattice but have as little average energy as possible.

Thereafter, the constellation is divided into two groups, an inner and an outer group. Figure 3 illustrates a construction set 54, here identifying the inner group 56 and the outer group 58. 2^M signals form the inner group, and the inner group corresponds to the construction set 52 shown in Figure 2. The inner group 56 is selected from the original constellation in order to keep the average power as small as possible. The outer group 58 is selected from the rest of the original constellation also so that the average power can be

maintained as small as possible. Figure 4 illustrates the set 54, here divided into four subconstellations. The subconstellations here exhibit minimum squared distances of $4d_0$

A constellation of 2^{NM+1} signals is then constructed by concatenated N
 5 such two-dimensional constellations, and excluding the two N-dimensional signals corresponding to more than one two-dimensional outer signals. For each constituent two-dimensional constellation, the inner group is used to N-1 times as often as the outer group.

In an OFDM (Orthogonal Frequency Deletion Multiplexing) system,
 10 OTD (Orthogonal Transmit Diversity) is performable over the entire OFDM symbol. Use is made, for instance, of the Radon-Hurwitz unitary transform which is defined as:

$$R-H\begin{pmatrix} s_1 \\ s_2 \end{pmatrix} = \begin{bmatrix} s_1 & s_2^* \\ -s_2 & s_1 \end{bmatrix}. \quad (1)$$

Figure 5 illustrates again the apparatus of 28 of an embodiment of the
 15 present invention. Here, the data to be communicated by the access points to a mobile terminal is designated to be sourced at the binary source 62. The data is provided to a multi-dimensional TCM modulator 64. The modulator is operable to perform multi-dimensional, TCM modulation operations and to
 20 generate symbol sequences on the lines 66 to be applied to modulation mapper and demultiplexers 68 formed on separate paths. Output symbols on the lines 70 are provided to element 72 and, in turn, to element 74, and thereafter multiplexed outputs therefrom are provided to Radon-Hurwitz transformer 76. Radon-Hurwitz transforms are performed thereat and thereafter provided to
 25 CP element 78 and, in turn, to transmit antennas 34.

Two consecutive OFDM symbols are, for purposes of explanation, referred to $\mathbf{X}_0\mathbf{X}_e$. At a first transmitter, \mathbf{X}_0 is transmitted during a first time epoch followed by \mathbf{X}_e during a second time epoch. And, at a second transmitter $-\mathbf{X}_e^*$ is transmitted during the first time epoch followed by
 30 transmission of \mathbf{X}_0^* during the second time epoch.

The use of the Radon-Hurwitz transform with spaced-time codes is advantageous as utilization of the transform allows the individual paths at the receiver to be separated.

For instance, by denoting diagonal matrices containing the DFT's of
 5 channel response vectors for the separate transmitter portions as Λ_1 and Λ_2 ,
 respectively. By assuming that the communication channel upon which the symbols
 are to be transmitted is constant over two consecutive time epochs, the demodulated
 receive signals at the respective time slots are governed by the following:

$$\begin{aligned} \mathbf{Y}_1 &= \Lambda_1 \mathbf{X}_o - \Lambda_2 \mathbf{X}_e^* \\ \mathbf{Y}_2 &= \Lambda_1 \mathbf{X}_e + \Lambda_2 \mathbf{X}_o^* \end{aligned} \quad (2)$$

10 Through appropriate substitution, the estimates of the consecutive OFDM
 symbols are represented as follows:

$$\begin{aligned} \hat{\mathbf{X}}_o &= \Lambda_1^* \mathbf{Y}_1 + \Lambda_2 \mathbf{Y}_2^* \\ \hat{\mathbf{X}}_e &= \Lambda_1^* \mathbf{Y}_2 - \Lambda_2 \mathbf{Y}_1^* \end{aligned} \quad (3)$$

Through additional substitution, the following is representative of the OFDM
 symbols:

$$\begin{aligned} \hat{\mathbf{X}}_o &= \left(|\Lambda_1|^2 + |\Lambda_2|^2 \right) \mathbf{Y}_1 \\ \hat{\mathbf{X}}_e &= \left(|\Lambda_1|^2 + |\Lambda_2|^2 \right) \mathbf{Y}_2 \end{aligned} \quad (4)$$

15 Thereby, OTD techniques are shown to improve the performance of
 TCM over fading channels. Assuming the two channels fade independently,
 then the average performance of Radon-Hurwitz/TCM approaches the
 performance of TCM over AWGN (Average White Gaussian Noise) provided
 20 that the expected value of the sum of the squares of the channel coefficients
 equal unity.

Figure 6 illustrates a graphical representation, shown generally at 84.
 The representation is a plot 86 of an exemplary performance of the bit error
 rate as a function of signal-to-noise ratio of symbol sequences transmitted
 25 during operation of an embodiment of the present invention. Analysis of the

graphical representation indicates that there is considerable improvement of communication quality upon fading channels without degradation over AWGN channels.

OFDM systems achieve frequency diversity by utilizing a wideband
5 signal. This diversity is better utilized when TCH is combined with OFDM, if the transmitted symbols are interleaved in frequency. Interleaving distributes the symbols over a wide frequency spacing that is wider than the coherence bandwidth of the channel. This further improves the performance, as most of the time, consecutive interleaved symbols do not experience deep fades.

10 While, in the exemplary implementation, the apparatus of an embodiment of the present invention is shown as a portion of a WLAN constructed pursuant to the IEEE 802.11 standard, operation of an embodiment of the present invention can also analogously be implemented in other communication systems in which communication is effectuated upon
15 communication channels susceptible to fading.

The preferred descriptions are of preferred examples for implementing the invention, and the scope of the invention should not be necessarily be limited by this description. The scope of the present invention is defined by the following claims.

We claim:

1. In a communication system having a sending station for sending data upon a communication channel, the communication channel susceptible to fading, an improvement of apparatus for the sending station for converting the data into a form to facilitate communication thereof upon the
5 communication channel, said apparatus comprising:
a multi-dimensional trellis-coded modulator coupled to receive indications of the data to be sent by the sending station, said multi-dimensional trellis-coded modulator for forming N-dimensional, trellis-encoded sequences therefrom;
10 a first transmit antenna and at least a second transmit antenna coupled to said multi-dimensional, trellis-coded modulator, a first N-dimensional sequence transduced by said first transmit antenna and a second N-dimensional transmit antenna transduced by said second transmit antenna, the first and second N-dimensional sequences exhibiting orthogonal transmit
15 diversity.
2. The apparatus of claim 1 wherein said multi-dimensional trellis-coded modulator convolutionally encodes the data and maps the data, once encoded, to a signal constellation.
3. The apparatus of claim 2 wherein the signal constellation into which the data, once encoded, is mapped is positioned into subsets of selected minimum squared distances.
4. The apparatus of claim 3 wherein convolutional encoding of the data is effectuated according to a rule of correspondence.
5. The apparatus of claim 4 wherein the rule of correspondence comprising defining intersubset transitions to correspond to shorter-than-average length transitions.

6. The apparatus of claim 4 wherein the rule of correspondence comprises defining intrasubset transitions to correspond to longer-than-average transitions.

7. The apparatus of claim 1 wherein the multi-dimensional trellis-coded modulator utilizes a Wei construction.

8. The apparatus of claim 1 wherein the first and second N-dimensional sequences applied to said first and second transmit antennas, respectively, comprise Radon-Hurwitz transforms.

9. The apparatus of claim 1 further comprising a mapper coupled between said multi-dimensional trellis codes and said first and at least second transmit antennas, said mapper for mapping OFDM (Orthogonal Frequency Division Multiplexer) symbols to said first and second transmit antennas.

10. In the communication system of claim wherein the data sent upon the communication channel is received at a receiving station, a further improvement of apparatus for the receiver for operating upon the data once received thereat, said apparatus comprising:

5 a demodulator coupled to receive indications of the data received at the receiving station, said demodulator for demodulating the indications to form separate sequences, the separate sequences used to estimate symbol values.

11. The apparatus of claim 1 wherein the communication system forms a WLAN (Wireless Local Area Network) having an access point and wherein said multi-dimensional trellis-coded modulator and said first and second transmit antennas form portions of the access point.

12. The apparatus of claim 11 wherein the data communicated by said first and second transmit antennas is communicated at a rate specified by an IEEE 802.11 standard.

13. In a method for communicating in a communication system having a sending station for sending data upon a communication channel, the communication channel susceptible to fading, an improvement of a method for converting the data into a form to facilitate communication thereof upon the communication channel, said method comprising:

modulating the data to be communicated upon the communication channel to form N-dimensional, trellis-encoded sequences therefrom; and

applying a first N-dimensional trellis-encoded sequence formed during said operation of modulating to a first transmit antenna and at least a second N-dimensional trellis-encoded sequence formed during said operation of modulating to at least a second transmit antenna, the first and second N-dimensional trellis-encoded sequences exhibiting orthogonal transmit diversity.

14. The method of claim 13 wherein said operation of modulating comprises convolutionally encoding the data into encoded form.

15. The method of claim 14 wherein said operation of modulating further comprises mapping the data, once encoded, to a signal constellation, the signal constellation defining an allowable symbol set.

16. The method of claim 15 wherein the symbol set to which the data, once encoded, is mapped during said operation of mapping is positioned into subsets of selected minimum squared distances.

17. The method of claim 16 wherein said operation of encoding the data is effectuated according to a rule of correspondence.


18. The method of claim 13 wherein the first and second N-dimensional sequences applied to the first and second transmit antennas, respectively, comprise Radon-Harwitz transforms.

19. The method of claim 13 wherein the communication system comprises a WLAN (Wireless Local Area Network) having an access point and wherein said operations of modulating and applying are performed at the access point.

20. The method of claim 19 wherein the first and second N-dimensional trellis-encoded sequences are applied during said operation of applying at rates specified pursuant to an IEEE 802.11 standard.

ABSTRACT

Apparatus, and an associated method, for facilitating communication of data upon a communication channel which exhibits fading. Orthogonal transmit diversity techniques and trellis-coded modulation techniques are utilized to form a signal permitting the communication of data at high data rates while maintaining spectral efficiency, good error rate performance, without excessive computational complexity. The apparatus and associated method is advantageously implemented in a WLAN (Wireless Local Area Network) constructed pursuant to the IEEE 802.11 standard.

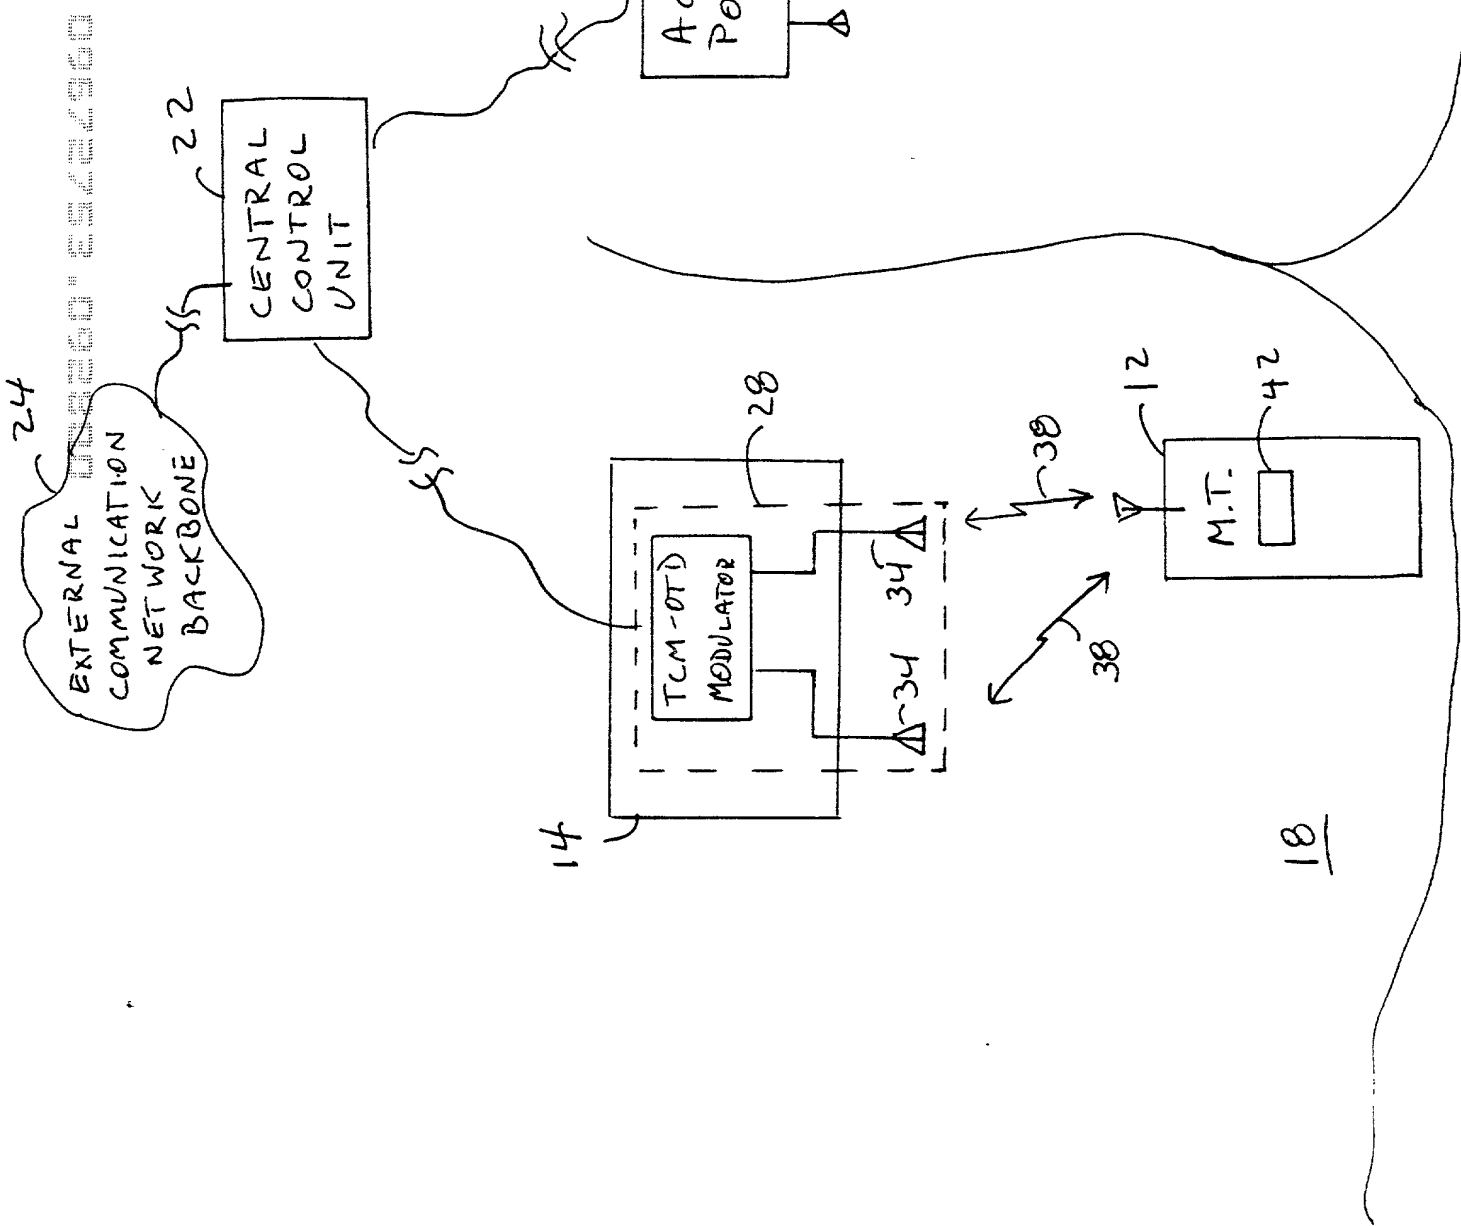

52

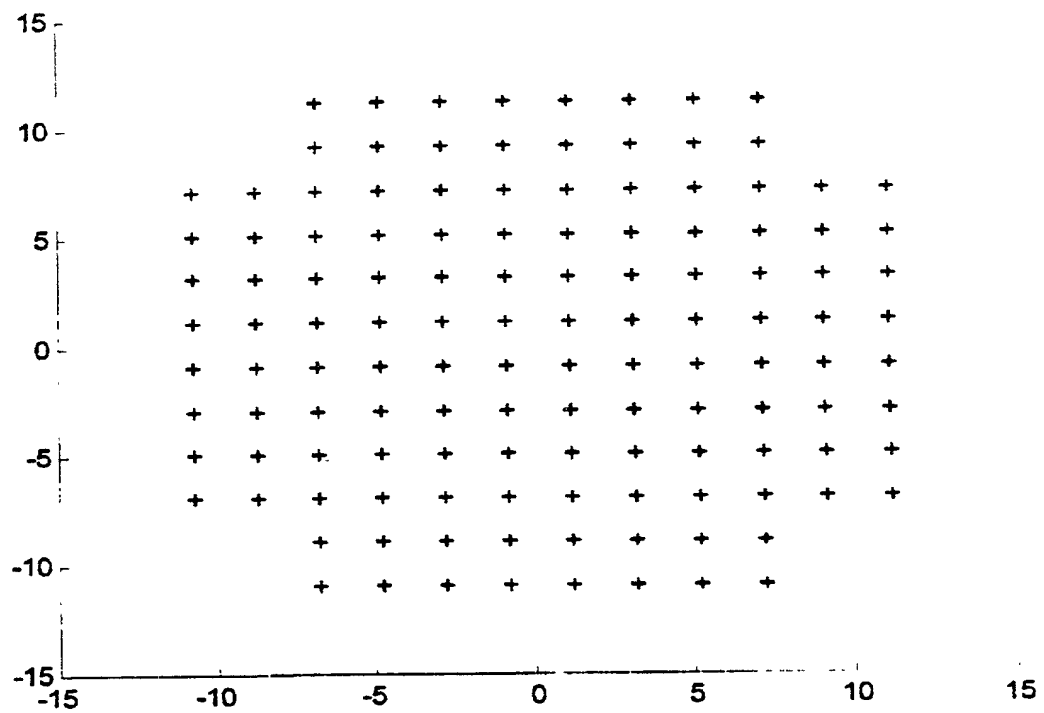


FIG. 2

A scatter plot showing a grid of data points. The x-axis and y-axis both range from -15 to 15, with major tick marks every 5 units. The data points are arranged in a regular grid pattern, with a central cluster of points enclosed by a dashed line. Handwritten annotations include the number '54' at the top center, '58' with an arrow pointing to a point at approximately (-5, 13), and '56' with an arrow pointing to a point at approximately (8, 12).

FIG. 3

Parameter	Value	Unit
Age	25.0	yr
Weight	70.0	kg
Height	1.75	m
Sex	Male	
Smoking	Non-smoker	
Alcohol	0.0	g/day
Exercise	0.0	min/week
Stress	0.0	score
Family history	0.0	score
Genotype	AA	
Phenotype	Normal	
Diagnosis	Normal	
Prognosis	Good	
Treatment	None	
Follow-up	0.0	yr
Outcome	Good	
Adverse effects	0.0	score
Quality of life	0.0	score
Health status	0.0	score
Compliance	0.0	score
Adherence	0.0	score
Continuity	0.0	score
Consistency	0.0	score
Stability	0.0	score
Reliability	0.0	score
Validity	0.0	score
Accuracy	0.0	score
Precision	0.0	score
Specificity	0.0	score
Sensitivity	0.0	score
Positive predictive value	0.0	score
Negative predictive value	0.0	score
Diagnostic accuracy	0.0	score
Prognostic accuracy	0.0	score
Treatment accuracy	0.0	score
Follow-up accuracy	0.0	score
Outcome accuracy	0.0	score
Adverse effects accuracy	0.0	score
Quality of life accuracy	0.0	score
Health status accuracy	0.0	score
Compliance accuracy	0.0	score
Adherence accuracy	0.0	score
Continuity accuracy	0.0	score
Consistency accuracy	0.0	score
Stability accuracy	0.0	score
Reliability accuracy	0.0	score
Validity accuracy	0.0	score
Accuracy accuracy	0.0	score
Precision accuracy	0.0	score
Specificity accuracy	0.0	score
Sensitivity accuracy	0.0	score
Positive predictive value accuracy	0.0	score
Negative predictive value accuracy	0.0	score
Diagnostic accuracy accuracy	0.0	score
Prognostic accuracy accuracy	0.0	score
Treatment accuracy accuracy	0.0	score
Follow-up accuracy accuracy	0.0	score
Outcome accuracy accuracy	0.0	score
Adverse effects accuracy accuracy	0.0	score
Quality of life accuracy accuracy	0.0	score
Health status accuracy accuracy	0.0	score
Compliance accuracy accuracy	0.0	score
Adherence accuracy accuracy	0.0	score
Continuity accuracy accuracy	0.0	score
Consistency accuracy accuracy	0.0	score
Stability accuracy accuracy	0.0	score
Reliability accuracy accuracy	0.0	score
Validity accuracy accuracy	0.0	score
Accuracy accuracy accuracy	0.0	score
Precision accuracy accuracy	0.0	score
Specificity accuracy accuracy	0.0	score
Sensitivity accuracy accuracy	0.0	score
Positive predictive value accuracy accuracy	0.0	score
Negative predictive value accuracy accuracy	0.0	score
Diagnostic accuracy accuracy accuracy	0.0	score
Prognostic accuracy accuracy accuracy	0.0	score
Treatment accuracy accuracy accuracy	0.0	score
Follow-up accuracy accuracy accuracy	0.0	score
Outcome accuracy accuracy accuracy	0.0	score
Adverse effects accuracy accuracy accuracy	0.0	score
Quality of life accuracy accuracy accuracy	0.0	score
Health status accuracy accuracy accuracy	0.0	score
Compliance accuracy accuracy accuracy	0.0	score
Adherence accuracy accuracy accuracy	0.0	score
Continuity accuracy accuracy accuracy	0.0	score
Consistency accuracy accuracy accuracy	0.0	score
Stability accuracy accuracy accuracy	0.0	score
Reliability accuracy accuracy accuracy	0.0	score
Validity accuracy accuracy accuracy	0.0	score
Accuracy accuracy accuracy	0.0	score
Precision accuracy accuracy accuracy	0.0	score
Specificity accuracy accuracy accuracy	0.0	score
Sensitivity accuracy accuracy accuracy	0.0	score
Positive predictive value accuracy accuracy accuracy	0.0	score
Negative predictive value accuracy accuracy accuracy	0.0	score
Diagnostic accuracy accuracy accuracy accuracy	0.0	score
Prognostic accuracy accuracy accuracy accuracy	0.0	score
Treatment accuracy accuracy accuracy accuracy	0.0	score
Follow-up accuracy accuracy accuracy accuracy	0.0	score
Outcome accuracy accuracy accuracy accuracy	0.0	score
Adverse effects accuracy accuracy accuracy accuracy	0.0	score
Quality of life accuracy accuracy accuracy accuracy	0.0	score
Health status accuracy accuracy accuracy accuracy	0.0	score
Compliance accuracy accuracy accuracy accuracy	0.0	score
Adherence accuracy accuracy accuracy accuracy	0.0	score
Continuity accuracy accuracy accuracy accuracy	0.0	score
Consistency accuracy accuracy accuracy accuracy	0.0	score
Stability accuracy accuracy accuracy accuracy	0.0	score
Reliability accuracy accuracy accuracy accuracy	0.0	score
Validity accuracy accuracy accuracy accuracy	0.0	score
Accuracy accuracy accuracy	0.0	score
Precision accuracy accuracy accuracy	0.0	score
Specificity accuracy accuracy accuracy accuracy	0.0	score
Sensitivity accuracy accuracy accuracy accuracy	0.0	score
Positive predictive value accuracy accuracy accuracy accuracy	0.0	score
Negative predictive value accuracy accuracy accuracy accuracy	0.0	score
Diagnostic accuracy accuracy accuracy accuracy accuracy	0.0	score
Prognostic accuracy accuracy accuracy accuracy accuracy	0.0	score
Treatment accuracy accuracy accuracy accuracy accuracy	0.0	score
Follow-up accuracy accuracy accuracy accuracy accuracy	0.0	score
Outcome accuracy accuracy accuracy accuracy accuracy	0.0	score
Adverse effects accuracy accuracy accuracy accuracy accuracy	0.0	score
Quality of life accuracy accuracy accuracy accuracy accuracy	0.0	score
Health status accuracy accuracy accuracy accuracy accuracy	0.0	score

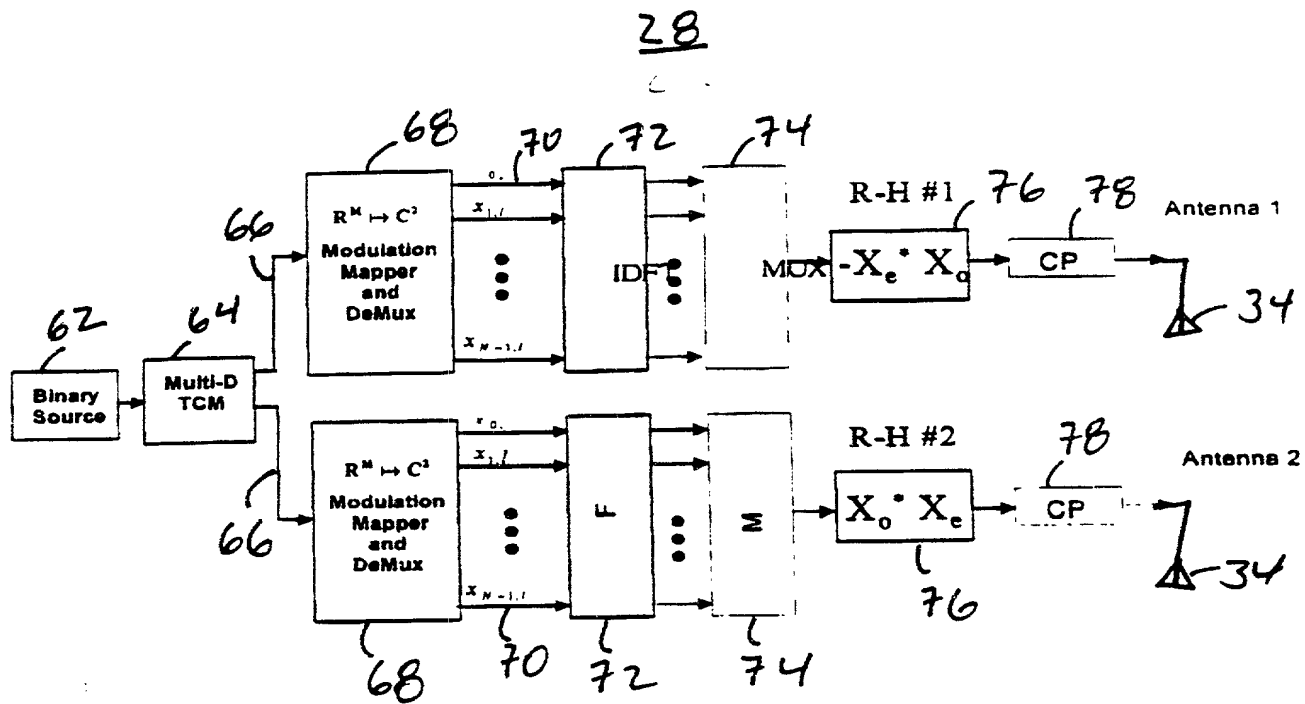


FIG. 5

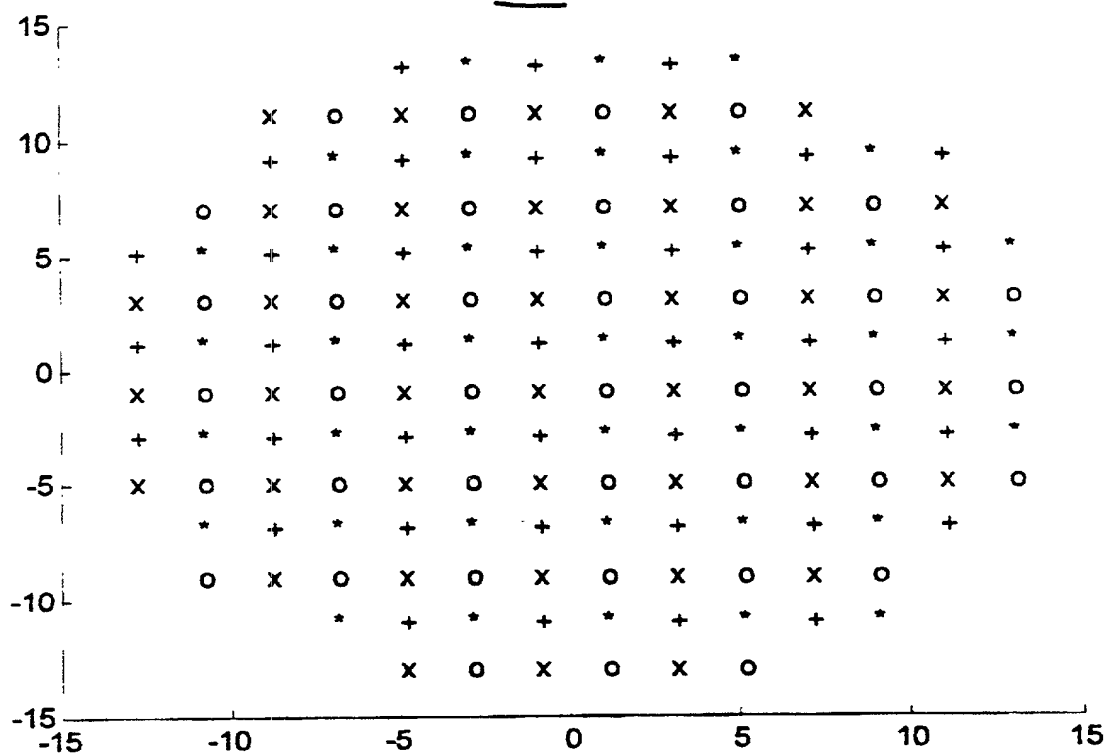
[illegible]

FIG. 4

84

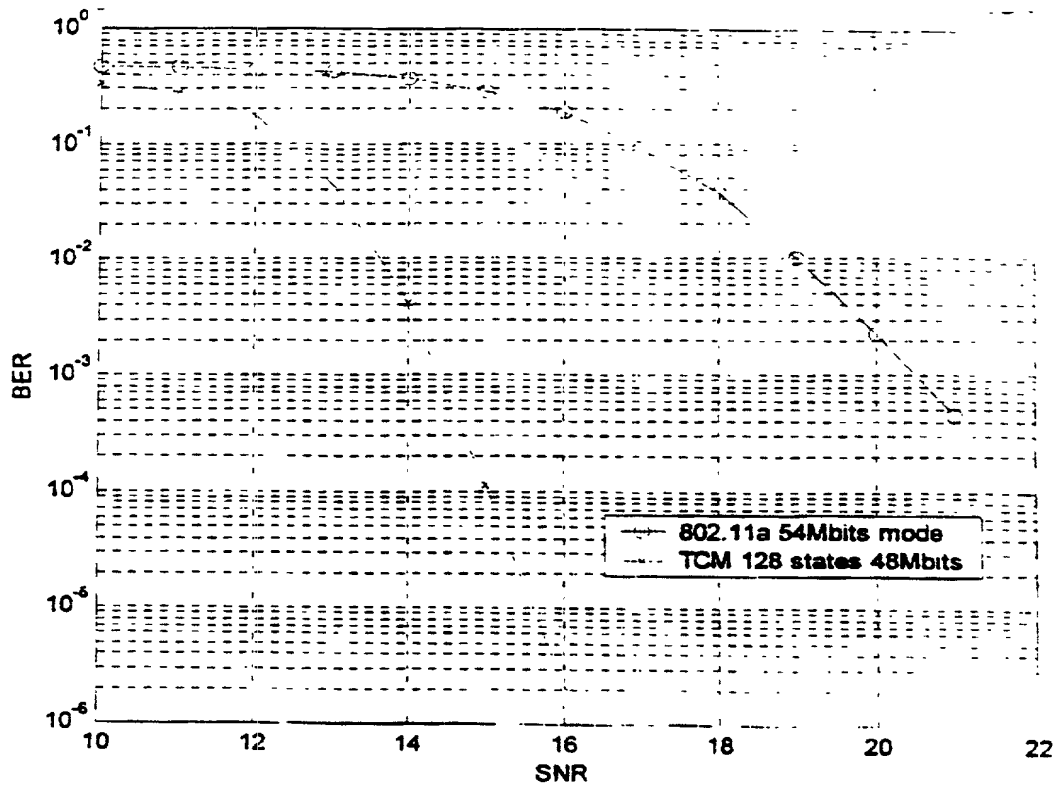


FIG. 6

COMBINED DECLARATION AND POWER
OF ATTORNEY FOR PATENT APPLICATION

DECLARATION:

As below named inventors, we hereby declare that:

Our residence, post office addresses and citizenship are as stated below next to our names.

We believe we are the original, first and joint inventors of the subject matter which is claimed and for which a patent is sought on the invention entitled APPARATUS, AND ASSOCIATED METHOD, FOR FORMING A MODULATED SIGNAL UTILIZING OTD AND TCM TECHNIQUES, the specification of which was filed September 28, 2000.

The persons named as inventors in this application are Juha Heiskala and John Terry.

We hereby state that we have reviewed and understand the contents of the above-identified specification, including the claims.

We acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

No prior foreign application for patent or inventor's certificate has been filed.

No priority claim is made under 35 U.S.C. § 119 or 35 U.S.C. § 120.

POWER OF ATTORNEY:

As named inventors, we hereby appoint Brian T. Rivers, Reg. No. 41,270, Robert C. Rolnik, Reg. No. 37,995, Milan I. Patel, Reg. No. 41,242, Jerald J. Gnuschke, Reg. No. 42,588, Paul Juhasz, Reg. No. 36,345, Allen Scott Lineberry, Reg. No. P44,873, Robert H. Kelly, Reg. No. 33,922, Earl C. Hancock, Reg. No. 19,472, F.A. "Sandy" Sirr, Reg. No. 17,265, and Patrick McBride, Reg. No. 39,295, to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. Send all correspondence to: Robert H. Kelly, HOLLAND & HART^{LLP}, 555 17th Street, Suite 3200, P.O. Box 8749, Denver, Colorado 80201, and direct telephone calls to Robert H. Kelly, telephone number 719-475-6463.

We hereby declare that all statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Inventor's Full Name:	Juha Heiskala
Inventor's Signature:	
Date:	
Residence: (City, State and/or country)	9486 Valley Ranch Parkway, Apt. 2081 Irving, Texas 75063
Citizenship:	Finnish
Post Address Office:	same as residence address above

Inventor's Full Name:	John Terry
Inventor's Signature:	
Date:	
Residence: (City, State and/or country)	1402 Blakes Way Garland, Texas 75042
Citizenship:	U.S.A.
Post Address Office:	same